EXPERTS IN
FACTORY AUTOMATION

ATF
Axial Tape Feeder

- Efficient and productive feeding
- Integrated lead cutting and bending unit
- Wide component range
- Easy readjustment
- Excellent price-performance ratio
- Intelligent communication with placement system
- Easy user interface
- Fits all OFP-equipment

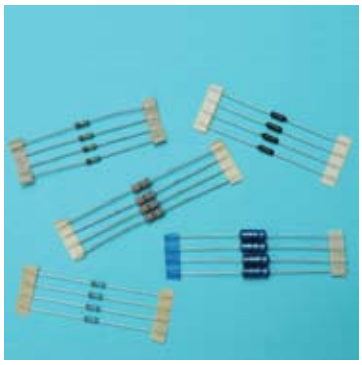

EXPERTS IN
FACTORY AUTOMATION

ATF
Axial Tape Feeder

Technical Specification

	ATF	ATF XL
Cycle Time per Component:	< 0.8 sec. all included	
Outside Dimensions: (L x D x H) :	90 x 1,060 x 392 mm	120 x 1,060 x 392 mm
Tape Norm:	DIN IEC 286 and EIA296	
Tape Width:	63 - 67 mm	78 - 97 mm
Component Dimensions:	Max. Ø 24 mm, 41 mm length	Max. Ø 24 mm,71 mm length
Standard Grid:	12 - 48 mm	
Leads Diameter:	0.4 - 0.8 mm Round, Oval or Square	
Lead Cutting:	0° (other angles are optional)	
Reel Diameter:	Max. 400 mm or optional Ammo Pack	
Pick Position Repeatability:	± 50 µ at 4 Sigma	
Color:	Blank Anodized	
Electrical Power:	24 V	
Interface:	IPTE (others on request)	
Operator Panel:	IPTE	
Compressed Air:	5 - 8 bar	

Options

Multi step tool (e.g. pre-forming)
Tape cutter
Component contacting and centering tool
'Feeder almost empty' detection
Splice tool
Reel tape separator
Ammo pack holder
Reel clamping set
Software download cable
Mechanical interface for EasyMounter
Mechanical and electrical interface for EasyMounter

IPTE
Geleenlaan 5
3600 Genk
Belgium
Tel: +32 (0)89 623 000
Fax: +32 (0)89 623 010
Email: info@ipte.com

IPTE SALES
Detailed information on our worldwide sales offices can be found on our website at www.ipte.com

WWW.IPTE.COM

DOC.F00111.4, ATF Axial Tape Feeder (EN), 16/jun/10 © IPTE - Specifications can be changed without notice