



BBL Bareboard Loader



- Konfigurierbare Lade-Einheit für unbestückte Leiterplatten
- Beladung von oben
- Mechanische Leiterplatten-Vereinzelung
- Lean Design - optimierte Standfläche
- Bedienerfreundlich - Color Touchscreen
- Einfache Konfiguration
- Integrierte Diagnose
- Rahmen aus gehärtetem Stahl
- Geeignet für die Pass / Fail sortierung

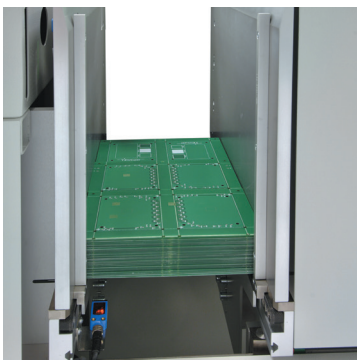

BBL

Bareboard Loader

PCB Specification	
PCB Width:	50 - 360 mm
PCB Length:	50 - 460 mm
PCB Ratio:	0,8 (length \geq 0,8 x width)
PCB Thickness:	0,8 - 4 mm
PCB Weight:	500 gr
Process Specification	
Buffer capacity:	300 mm
Maximum buffer weight:	30 kg
Technical Specification	
PCB exchange time:	8 sec
PCB Transport speed:	300 mm/sec
Transport height:	930 - 1.000 mm
Transport direction:	L \Rightarrow R, R \Rightarrow L (to be specified at time of order)
Protection screens:	ESD Safe
Controller:	Omron
Energy requirements:	230 \pm 10%, 50Hz - 110V \pm 10%, 60 Hz - 300 VA
Compressed air:	6 bar - 20%, 40 l/min, according to DIN ISO 8573 3.4.5
Color:	RAL 7035 ESD
Dimensions (L x D x H):	500 x 760 x 1.320 mm
Weight:	144 kg
Interface:	SMEMA
Standards:	CE Approved
Options	
Automatic width adjustment	
Adaption for thin PCBs (< 0,8 mm, vacuum cassette)	
Bus system (RS 232 / RS 485, Ethernet)	
SMEMA specific (Siemens, SMPI, Fuji, Panasonic, Sanyo)	
Extra stack exchange	
Different transport heights (780 - 940 mm / 990 - 1.100 mm)	
PCB Thickness: 0,4 mm	

■ IPTE

Schleifweg 14
90562 Heroldsberg
Germany
Tel: +49 (0)911 7848 0
Fax: +49 (0)911 7848 204
Email: info@ipte.com

■ IPTE Vertrieb

Mehr Informationen über
unsere Internationale
Vertriebsorganisation finden
Sie auf unserer Homepage
www.ipte.com

WWW.IPTE.COM