


FLU Flip Unit



- Smooth PCB flipping
- Lean design - optimized footprint
- User friendly interface - Color touchscreen
- Easy configuration
- Integrated diagnostic tool
- Welded steel frame

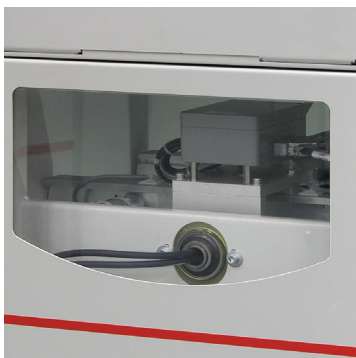

FLU

Flip Unit

PCB Specification	
PCB Width:	50 - 360 mm
PCB Length:	50 - 460 mm
PCB Ratio:	0,8 (length \geq 0,8 x width)
PCB Thickness:	0,4 - 4 mm
Component height (top side):	25 mm
Component height (bottom side):	25 mm (including warpage)
PCB Edge support:	2,0 - 4,5 mm
PCB Weight:	2,5 kg
Technical Specification	
PCB Exchange time:	8 sec
PCB Transport speed:	100 - 700 mm/sec
Transport height:	930 - 1.000 mm
Transport direction:	L \Rightarrow R or R \Rightarrow L (to be specified at time of order)
Protection screens:	ESD Safe
Controller:	Omron
Energy requirements:	230 V \pm 10%, 50 Hz - 208 V \pm 10%, 60 Hz - 400 VA
Compressed air:	6 bar - 20% bar, 40 l/min, according to DIN ISO 8573 3.4.5
Color:	RAL 7035 ESD
Dimensions (L x D x H):	500 x 760 x 1.300 mm
Weight:	126 kg
Interface:	SMEMA
Standards:	CE Approved
Options	
Automatic width adjustment	

■ IPTE

Geleenlaan 5
3600 Genk
Belgium
Tel: +32 (0)89 623 000
Fax: +32 (0)89 623 010
Email: info@ipte.com

■ IPTE Sales

Detailed information on our worldwide sales offices can be found on our website

WWW.IPTE.COM