



MGU Manual Gate Unit

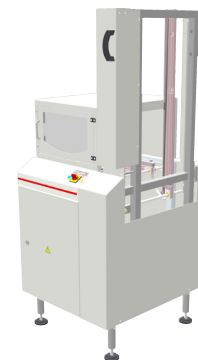

- Easy and reliable passage
- Light opening mechanism
- Lean design - optimized footprint
- Easy configuration
- Welded steel frame

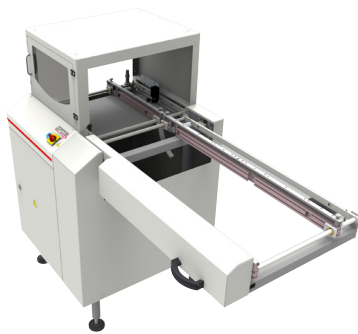

MGU

Manual Gate Unit

PCB Specification	
PCB Width:	50 - 360 mm
PCB Length:	50 - 460 mm
PCB Ratio:	0,8 (length \geq 0,8 x width)
PCB Thickness:	0,8 - 4 mm
Component height (top side):	max. 100 mm
Component height (bottom side):	max. 25 mm
PCB Edge support:	2,0 - 4,5 mm
PCB Weight:	2,5 kg
Process Specification	
Passage width:	800 mm
Technical Specification	
PCB Exchange time:	8 sec
PCB Transport speed:	100 - 800 mm/sec
Transport height:	930 - 1.000 mm
Transport direction:	L \Rightarrow R or R \Rightarrow L (to be specified at time of order)
Protection screens:	ESD Safe
Controller:	Omron
Energy requirements:	230 \pm 10%, 50Hz - 110V \pm 10%, 60 Hz - 100 VA
Color:	RAL 7035 ESD
Dimensions (L x D x H):	1.500 x 760 x 1.300 mm
Weight:	160 kg
Interface:	SMEMA
Standards:	CE Approved
Options	
	Automatic width adjustment
	Bus system (RS 232 / RS 485, Ethernet)
	SMEMA specific (Siemens, SMPI, Fuji, Panasonic, Sanyo)
	Transport speed adjustable 100 to 800 mm/s
	Different transport heights (780 - 940 mm / 990 - 1.100 mm)
	Lock gate during transfer
	PCB Thickness: 0,4 mm

■ IPTE
Geleenlaan 5
3600 Genk
Belgium
Tel: +32 (0)89 623 000
Fax: +32 (0)89 623 010
Email: info@ipte.com

■ IPTE Sales
Detailed information on our
worldwide sales offices can
be found on our website at
www.ipte.com

WWW.IPTE.COM