


BTR XY Scan



- 2D Matrix Code, Bar Code Scanner
- 360 x 360 mm Scan Area
- Free programmable scan positions
- Lean design - optimized footprint
- Easy configuration
- User friendly HMI (TS1)
- PC Controlled Modular Unit

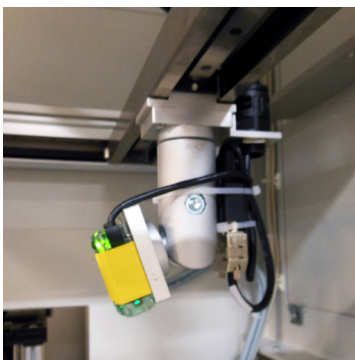

BTR XY Scan

PCB Specification	
PCB Width:	50 - 360 mm
PCB Length:	50 - 460 mm
PCB Ratio:	0,8 (length \geq 0,8 x width)
PCB Thickness:	0,8 - 4 mm
Component height (top side):	max. 50 mm
Component height (bottom side):	max. 25 mm
PCB Edge support:	2,0 - 4,5 mm
PCB Weight:	2,5 kg
Process Specification	
Scanner Type:	Microscan mini or Keyence SR6xx/SR7xx
Stopper:	Mechanical stopper and sensor
Technical Specification	
PCB Exchange time	3 sec (excluding scanning)
PCB Transport speed:	100 - 800 mm/sec
Transport height:	930 - 1.000 mm
Transport direction:	L \Rightarrow R, R \Rightarrow L (to be specified at time of order)
Protection screens:	ESD
Controller:	Omron
Energy requirements:	230 \pm 10%, 50Hz - 110V \pm 10%, 60 Hz - 100 VA
Compressed air:	6 - 20% bar, according to DIN ISO 8573 3.4.5
Color:	RAL 7035 ESD Safe
Dimensions (L x D x H):	500 x 760 x 980 mm
Weight:	100 kg
Standards:	CE, SMEMA
Options	
Automatic width adjustment	
Other Scanner type	
SMEMA specific (Siemens, SMPI, Fuji, Panasonic, Sanyo)	
Different transport heights (780 - 940 mm, 990 - 1.100 mm, 1.020 - 1.170 mm)	
360 x 360 mm Scan Area	

■ IPTE

Geleenlaan 5
3600 Genk
Belgium
Tel: +32 (0)89 623 000
Fax: +32 (0)89 623 010
Email: info@ipte.com

■ IPTE Sales

Detailed information on our worldwide sales offices can be found on our website at www.ipte.com

WWW.IPTE.COM